

The FQ range of Stainless-Steel cubicles has been built in compliance with the most recent international standards, with completely innovative construction design and protection concepts. It is therefore the ideal solution for applications in aggressive settings typical of the food, chemical, pharmaceutical industry or for applications in outdoor environments. It is possible to supply the FQ cubicles tailormade in accordance to customer needs. On request is available transparent glass door with a 3+3mm safety glass.



Telemagnetica S.r.l.

Via Teocrito, 36 - 20128 Milano
Tel. 02.255.29.00 - Fax 02.255.30.97
info@telemagnetica.com - www.telemagnetica.com

Dimensions

TECHNICAL DETAILS														
CODE	Dimensions			Weight	Volume	Available area for door drilling			Available width for side drilling	Mounting Plate			Heat load dissipation	
	B	H	P			C	D	A		G	I	E		F
FQ8012030	800	1200	300	59,50	0,288	737	1137	266	738	1168	710	1140	3	116W
FQ8012040	800	1200	400	65,00	0,384	737	1137	366	738	1168	710	1140	3	125W
FQ6014030	600	1400	300	54,50	0,252	500	1335	266	500	1382	472	1340	1*	110W
FQ6014040	600	1400	400	59,50	0,336	500	1335	366	500	1382	472	1340	1*	120W
FQ8014030	800	1400	300	70,00	0,336	700	1335	266	700	1382	672	1340	1*	130W
FQ8014040	800	1400	400	75,00	0,448	700	1335	366	700	1382	672	1340	1*	132W
FQ8016030	800	1600	300	77	0,384	700	1535	266	700	1582	672	1540	1*	150W
FQ8016040	800	1600	400	84	0,512	700	1535	366	700	1582	672	1540	1*	170W

* MULTIPOINT CLOSURE SYSTEM B=Base H=Height P=Depth

DEGREE OF PROTECTION AND STANDARDS REFERENCE

IP66 IK10
NEMA TYPE 1, 12, 4, 4X

89/392/EEC


EN 62208 : 2011

EN 60529/09.200
EN 50102/05.96



UL upon request

UL 508 A
NEMA STANDARD PUBLICATION 250

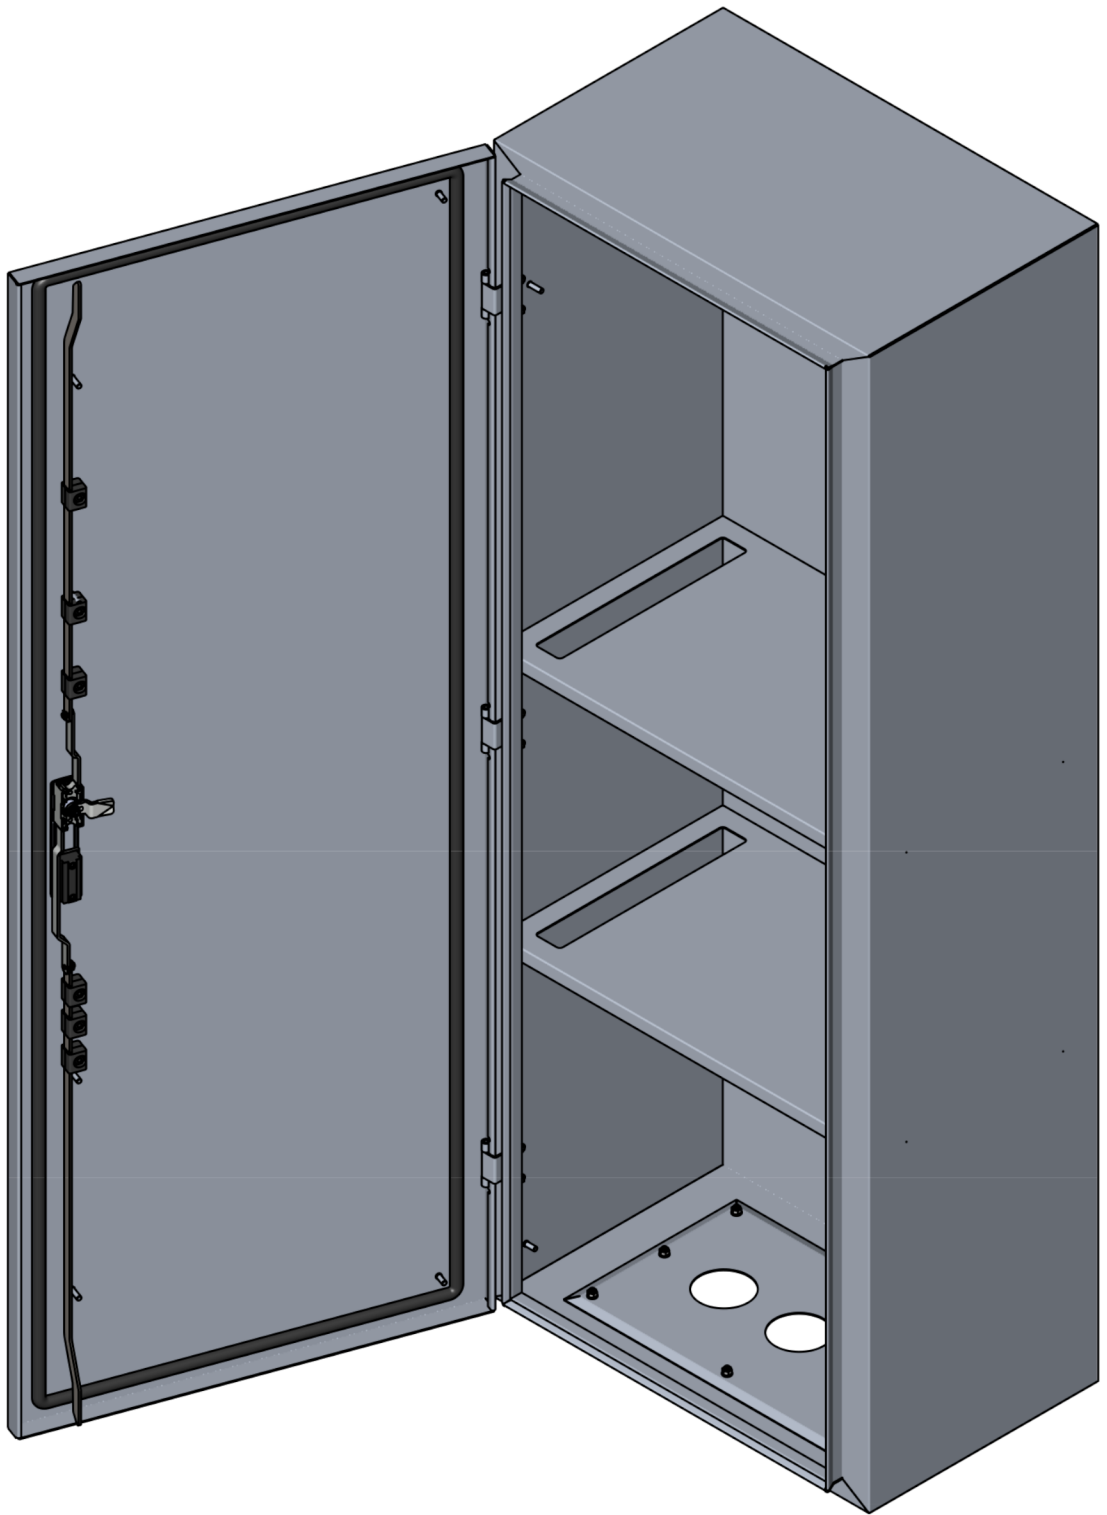

3					
2					
1					
0		Emissione	F. GAVOTO		
N	DATA	MODIFICHE	DISEGN.	CONTR.	APPROV.

NOTE



La proprietà di questo disegno e il divieto di riprodurlo o renderlo comunque noto a Ditte concorrenti o a terzi sono strettamente tutelati a termini di legge

SCALA
A4

TITOLO
ARMADIO INOX AISI 304L - IP66 - dim. 1400x600x400 mm
AISI 304L S.S. CUBICLE - IP66 - dim. 1400x600x400 mm

DWG:
P-8853-020
SOSTITUISCE IL
SOSTITUITO DAL