




Body and lid:	Made from polyester resin in black with antistatic properties
Impact protection rating:	IK10
Gasket:	Acid, hydrocarbon and high temperature-resistant silicone, located between body and lid
Mounting:	Polyester feet for M6 screws
Certification label:	Aluminium plate riveted into lid
Bolts and screws:	Stainless steel captive variety

Telemagnetica S.r.l.

Via Teocrito, 36 - 20128 Milano
Tel. 02.255.29.00 - Fax 02.255.30.97
info@telemagnetica.com - www.telemagnetica.com

Technical details

Code	Outside dimensions			Inside dimensions				X	Mounting			Weight kg
	A	B	C	a	b	c	S1		Y	X1	ØD	
SA090907/P	90	90	73	84	84	52	3	74	74	-	6.5	0.30
SA111108/P	110	110	83	104	104	65	3	94	94	-	6.5	0.40
SA171108/P	170	110	83	164	104	65	3	154	94	-	6.5	0.80
SA141410/P	147	147	100	135	135	79	3	131	131	-	6.5	1.00
SA301410/P	305	147	110	296	138	90	4.5	285	127	-	6.5	1.90
SA302310/P	305	230	110	296	221	90	4.5	285	210	-	6.5	2.50
SA302318/P	305	230	190	296	221	165	4.5	285	210	-	6.5	3.10
SA473018/P	470	305	195	460	295	175	5	450	285	225	6.5	4.70
SA623018/P	620	305	185	608	293	160	5	560	285	260-300	8	6.30

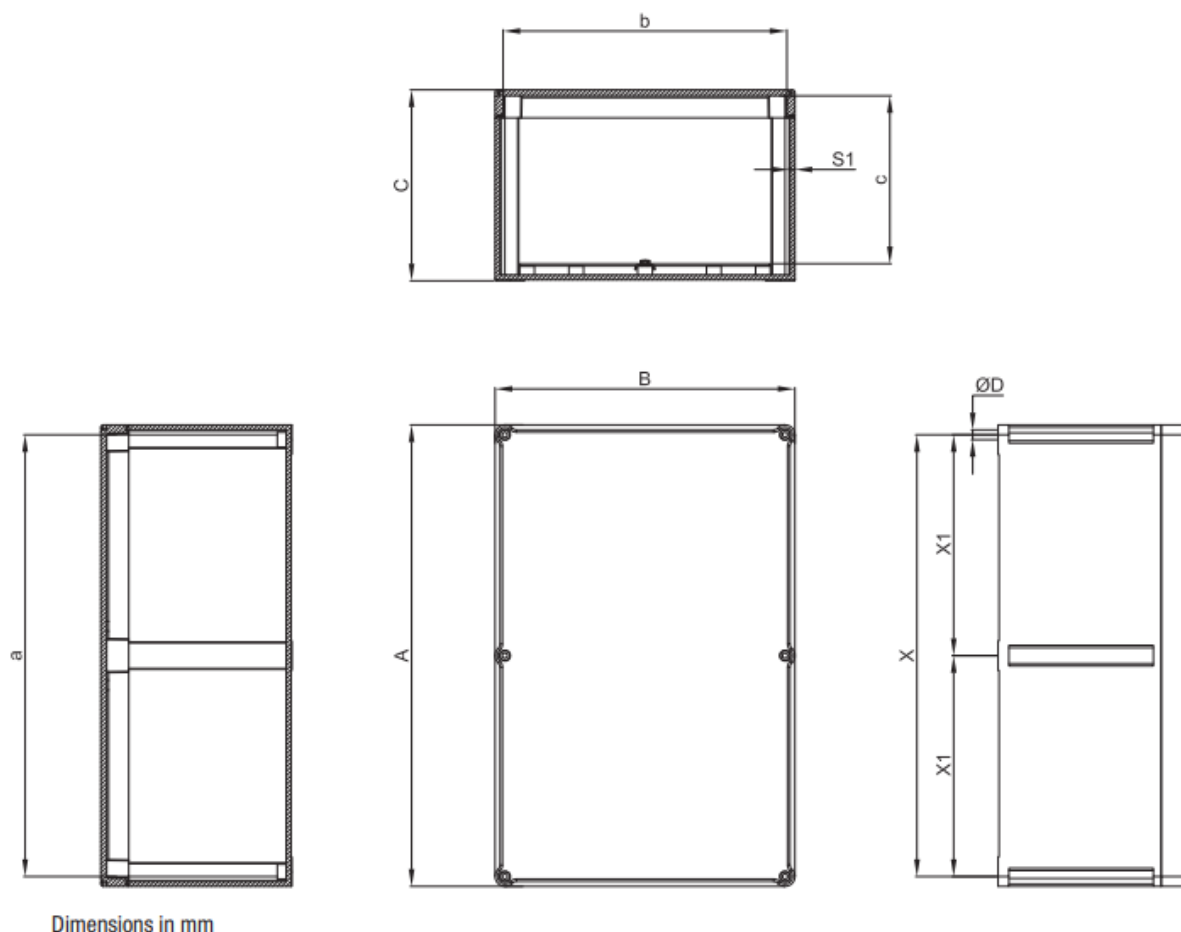

Telemagnetica S.r.l.

Via Teocrito, 36 - 20128 Milano
 Tel. 02.255.29.00 - Fax 02.255.30.97
info@telemagnetica.com - www.telemagnetica.com